

IMPULSE COUNTER

Application:

The panel meter is suitable for measuring the counting impulse signal. The input is controlled by a switch or voltage signal.

Important features:

- Full digital operation (Icom System).
- LED display range: 9999, unit marking by LED.
- Preset delivery or connecting to external device can be set (monlcom option).
- Non volatile memory for counter content.
- Plug in terminal blocks with screw.
- EMC compliance.



Illustration only.

Technical specifications:

Input:

- Impulse counter speed: max. 10 pulse / s
- Impulse width: min. 1 ms
- Impulse counter rotation (non volatile): 0...9999 or 0...59999
- Impulse input switch: $R_{max} = 1.2 \text{ kohm}$ for close, $R_{min} = 15 \text{ kohm}$ for open
- Impulse input voltage level: $L_{max} = +1.2 \text{ V}$, $H_{min} = +3.8 \text{ V}$, $I = 3 \text{ uA}$
- Impulse input voltage range: 0 ... +50V DC
- Input insulation voltage: Cat. III. 1 kV (Test: 4300 V_{eff} 1 min)


Display:

- Display colours: red (basic version), orange, yellow, green, blue, white LED
- Height of digits: 14 mm
- Brightness control: via dimming input on rear (optional)
- Dimmer input signal: 5V PWM, approx. 1 kHz
- Dimmer input isolation: Cat. III. 1 kV (Test: 4300 V_{eff} 1 min)
- Display update: 2 / s

Other:

- Standards applied: IEC/EN 61010-1, IEC/EN 61326
- Auxiliary supply consumption: max. 2 W
- Wire cross-section of terminals: max. 2.5 mm²
- Working temperature: -10...+25...+60 °C
- Warm-up time: 15 min
- Storage temperature: -40...+80 °C
- Humidity: max. 85 %
- Vibration (acceleration): max. 2 g
- Dimension (HxWxD): 48 mm x 96 mm x 74 mm
- Case protection: from the front IP 40, from behind IP 20
- Case material: PC-GF
- Weight: approx. 0.3 kg

Connection diagram:

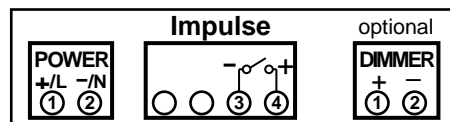


IMPULSE COUNTER

Auxiliary Supply variations:

5 V, 12 V, 24 V, 48 V DC $\pm 50\%$, converter	(Voltage / Insulation)	/ 1 kV
55...264 V, 47...440 Hz, and 72...370 V DC, converter		/ 3 kV
9...28 V DC		/ not isolated from display

Isolation scheme:

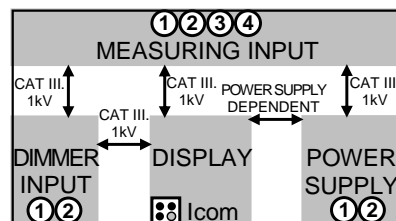

Ordering examples: (Input; Display: range, unit, colour; Auxiliary Supply)

CD40-96p-IMP _ Input: 0...+5V _ Display: 0...9999 PCS, yellow _ Aux: 55..264 V AC converter

CD40-96p-IMP _ Input: Switch _ Display: 0...9999 PCS, green, dimmable _ Aux: 24 V DC converter

On request for extra charge special ranges (Input, Display, Auxiliary Supply) are possible.

Outline and cut-out dimensions:

