



HD 4807T... HD 4907T...
 HD 48V07T... HD 4901T...
 HD 4801T... HD 4917T...
 HD 48V01T... HD 4977T...
 HD 4817T...
 HD 48V17T...
 HD 4877T...
 HD 48V77T...



**HD 4807T..., HD 48V07T..., HD 48S07T..., HD 4801T...,
 HD 48V01T..., HD 4817T..., HD 48V17T..., HD 4877T... HD 48V77T...,
 HD 4907T..., HD 4901T..., HD 4917T..., HD 4977T...
 TEMPERATURE AND RELATIVE HUMIDITY TRANSMITTERS, RELATIVE HUMIDITY,
 TEMPERATURE AND RELATIVE HUMIDITY, TEMPERATURE AND DEW POINT**

HD48.. and HD49.. series of transmitters measure temperature, relative humidity and dew point. Versions with only standard analog output or with only RS485 output with MODBUS-RTU protocol are available. The models with analog output provide a signal suitable for transmission to a remote display, recorder or PLC. The models with RS485 output are suitable for connection to a PC or PLC.

The models of the HD48.. series are active transmitters and accept both direct and 24Vac alternating power supply; they have standard current (4...20mA) or voltage (0...10V) outputs, or a serial RS485 output, depending on the model. The models of the HD49.. series are passive transmitters instead, and thus suitable to be inserted in a 4...20mA current loop.

The HD48.. and HD49.. series of transmitters are designed for temperature and humidity control in conditioning and ventilation applications (HVAC/BEMS) in the following sectors: pharmacy, museums, clean rooms, ventilation ducts, industrial and civil sectors, crowded places, canteens, auditoria, gyms, high-density farms, greenhouses, etc.

The HD48.. and HD49.. transmitters measure relative humidity with a well proven temperature compensated capacitive sensor that assures precise and reliable measurements in the course of time. The transmitters of the HD48.. and HD49.. series are available in two probe temperature ranges: standard **-20...+80°C** and **extended -40...+150°C for the most critical applications**. A stainless steel 20µm filter protects the sensors against dust and particles (other filters are available for different applications).

The transmitters are factory calibrated and no further adjustments are required.

Each series is available in three different versions: with horizontal probe for duct mounting (HD48...TO..., HD49...TO...), with vertical probe for wall mounting (HD48...TV..., HD49...TV...) or with remote probe connected to the transmitter by means of a cable (HD48...TC..., HD49...TC...), cable lengths available are 2, 5 and 10m.

The probes can be supplied in two different lengths (135mm or 335mm).

Various accessories are available for the installation: for example to fix the probe to the duct, it can be used the HD9008.31 flange, a 3/8" universal biconical connection or a PG16 metal cable gland (Ø10...14mm). A 4-digit optional LCD ("L" model) allows to display the measured parameters in a continuous or sequential mode.

Technical specifications

		STANDARD RANGE	EXTENDED RANGE
Relative Humidity			
Sensor	Capacitive		
Measuring range	0...100%RH		
Accuracy	±2% (10...90%RH), ±2.5% outside		
Repeatability	0.4%RH		
Sensor working temperature	-20...+80°C	-40...+150°C	
Temperature			
Measuring range	-20...+80°C		-40...+150°C
Sensor	NTC 10kΩ		Pt100 class A
Accuracy	±0.3°C (0...+70°C) ±0.4°C (-20...0°C, +70...+80°C)		±0.3°C
Repeatability	0.05°C		0.05°C
Dew Point			
Sensor	Parameter calculated from relative humidity and temperature		
Measuring range	-20...+80°C DP		
Accuracy	See table TAB.1		
Repeatability	0.5°C DP		
Output type (depending on model)			
Models HD4807T..	Temperature	4...20mA (-20...+80°C), R _i < 500Ω 22mA outside the measuring range	
Models HD4807ET..	Temperature	4...20mA (-40...+150°C), R _i < 500Ω 22mA outside the measuring range	
Models HD48V07T..	Temperature	0...10Vdc (-20...+80°C), R _i > 10kΩ 11Vdc outside the measuring range	
Models HD48V07ET..	Temperature	0...10Vdc (-40...+150°C), R _i > 10kΩ 11Vdc outside the measuring range	
Models HD48S07T.. HD48S07ET..	Temperature	Only RS485 with MODBUS-RTU protocol	
Models HD4907T..	Temperature	4...20mA (-20...+80°C), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
Models HD4907ET..	Temperature	4...20mA (-40...+150°C), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
Models HD4801T.. HD4801ET..	Relative Humidity	4...20mA (0...100%RH), R _i < 500Ω 22mA outside the measuring range	
Models HD48V01T.. HD48V01ET..	Relative Humidity	0...10Vdc (0...100%RH), R _i > 10kΩ 11Vdc outside the measuring range	
Models HD48S01T.. HD48S01ET..	Relative Humidity	Only RS485 with MODBUS-RTU protocol	
Model HD4901T.. HD4901ET..	Relative Humidity	4...20mA (0...100%RH), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
Models HD4817T..	Relative Humidity	4...20mA (0...100%RH), R _i < 500Ω 22mA outside the measuring range	
	Temperature	4...20mA (-20...+80°C), R _i < 500Ω 22mA outside the measuring range	
Models HD4817TV..	Relative Humidity	4...20mA (0...100%RH), R _i < 500Ω 22mA outside the measuring range	
	Temperature	4...20mA (0...+60°C), R _i < 500Ω 22mA outside the measuring range	
Models HD4817ET..	Relative Humidity	4...20mA (0...100%RH), R _i < 500Ω 22mA outside the measuring range	
	Temperature	4...20mA (-40...+150°C), R _i < 500Ω 22mA outside the measuring range	
Models HD48V17T..	Relative Humidity	0...10Vdc (0...100%RH), R _i > 10kΩ 11Vdc outside the measuring range	
	Temperature	0...10Vdc (-20...+80°C), R _i > 10kΩ 11Vdc outside the measuring range	
Models HD48V17ET..	Relative Humidity	0...10Vdc (0...100%RH), R _i > 10kΩ 11Vdc outside the measuring range	
	Temperature	0...10Vdc (-40...+150°C), R _i > 10kΩ 11Vdc outside the measuring range	
Models HD48S17T.. HD48S17ET..	Relative Humidity	Only RS485 with MODBUS-RTU protocol	
	Temperature	Only RS485 with MODBUS-RTU protocol	
Models HD4917T..	Relative Humidity	4...20mA (0...100%RH), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
	Temperature	4...20mA (-20...+80°C), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
Models HD4917TV..	Relative Humidity	4...20mA (0...100%RH), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
	Temperature	4...20mA (0...+60°C), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
Models HD4917ET..	Relative Humidity	4...20mA (0...100%RH), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
	Temperature	4...20mA (-40...+150°C), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
Models HD4877T..	Dew Point	4...20mA (-20...+80°C DP), R _i < 500Ω 22mA outside the measuring range	
	Temperature	4...20mA (-20...+80°C), R _i < 500Ω 22mA outside the measuring range	
Models HD48V77T..	Dew Point	0...10Vdc (-20...+80°C DP), R _i > 10kΩ 11Vdc outside the measuring range	
	Temperature	0...10Vdc (-20...+80°C), R _i > 10kΩ 11Vdc outside the measuring range	
Models HD48S77T..	Dew Point	Only RS485 with MODBUS-RTU protocol	
	Temperature	Only RS485 with MODBUS-RTU protocol	
Models HD4977T..	Dew Point	4...20mA (-20...+80°C DP), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	
	Temperature	4...20mA (-20...+80°C), R _i Max = (Vdc-12)/0.022 22mA outside the measuring range	

Humidity

	STANDARD RANGE	EXTENDED RANGE
Power supply and connections		
	HD48..	HD49..
Power supply	16...40Vdc or 24 Vac $\pm 10\%$	12...40Vdc
Electrical connections	Screw type terminal block, max 1,5mm ² , M16 cable gland for input cable	
General specifications		
Electronics working temperature	0...+60°C	
Probe working temperature	STANDARD RANGE -20...+100°C	EXTENDED RANGE -40...+150°C
Storage temperature	-20...+80°C	
Electronics protection class	IP66	
Case dimensions	80x84x44	


TAB.1 - Accuracy of dew point measurement:

Temperature °C	DP °C								
	-20	-10	0	10	20	30	40	60	80
-20	$\leq \pm 1$								
-10	$\leq \pm 1$	$\leq \pm 1$							
0	$\leq \pm 1$	$\leq \pm 1$	$\leq \pm 1$						
10	$\leq \pm 3$	$\leq \pm 1$	$\leq \pm 1$	$\leq \pm 1$					
20	$\leq \pm 4$	$\leq \pm 2$	$\leq \pm 1$	$\leq \pm 1$	$\leq \pm 1$				
30		$\leq \pm 3$	$\leq \pm 1,5$	$\leq \pm 1$	$\leq \pm 1$	$\leq \pm 1$			
40				$\leq \pm 2$	$\leq \pm 1$	$\leq \pm 1$	$\leq \pm 1$		
60	NOT SPECIFIED			$\leq \pm 5$	$\leq \pm 2,5$	$\leq \pm 2$	$\leq \pm 1$	$\leq \pm 1$	
80					$\leq \pm 4$	$\leq \pm 2$	$\leq \pm 1$	$\leq \pm 1$	

For example at 20°C a Dew Point value of 0°C DP is measured with an accuracy better than 1°C DP.


Installation notes

To fix the probe inside a ventilation duct, a pipe, etc., use for example the HD9008.31 flange, a PG16 metal cable gland (Ø10...14mm) or a 3/8" universal biconical connection.

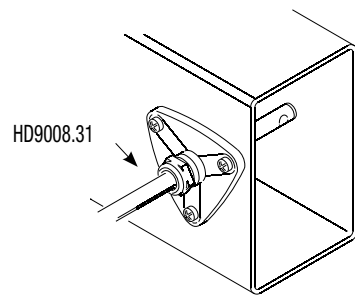


HD9008.31

HD9008.31 Flange

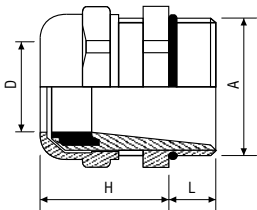

PG16 metal cable gland

D = 10...14mm
L = 6.5mm
H = 23mm
A = PG16

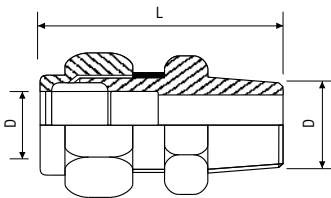

Universal biconical connector

L = 35mm
D = 14mm
A = 3/8"


Electrical connections

HD48.. series with analog output

Power the instrument as shown in the below connection schemes, the power supply terminals are marked as +Vcc and GND.


Depending on the model, the output signal is available between:

- Ta and AGND terminals for the transmitters of the HD4807T.. and HD48V07T.. series
- RH% and AGND terminals for the transmitters of the HD4801T.. and HD48V01T.. series
- RH% and AGND, Ta and AGND terminals for the transmitters of the HD4817T.. and HD48V17T.. series
- DP and AGND, Ta and AGND terminals for the transmitters of the HD4877T.. and HD48V77T.. series.

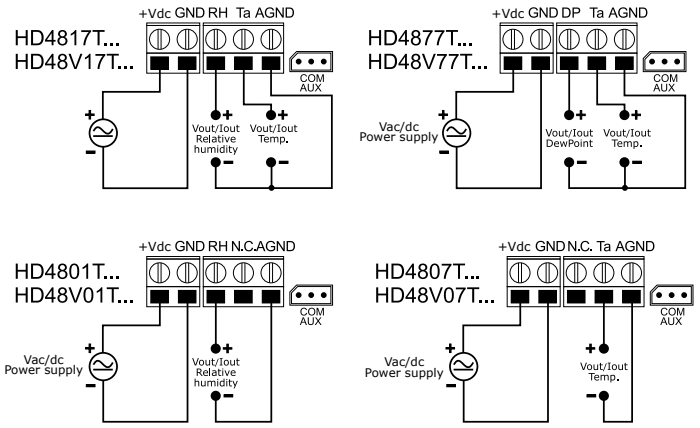


HD48.. series with RS485 output


Connect the instrument as shown in the below connection schemes, the power supply terminals are marked as +Vcc and GND.

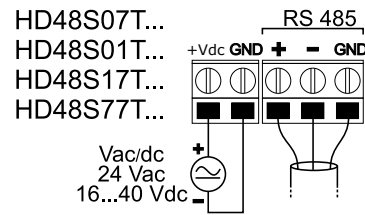

Thanks to RS485 output, several instruments can be connected to form a network, consisting of a minimum of 1 instrument to a maximum of 247, connected in a sequence through a shielded cable with twisted pair for signals and a third wire for the common.

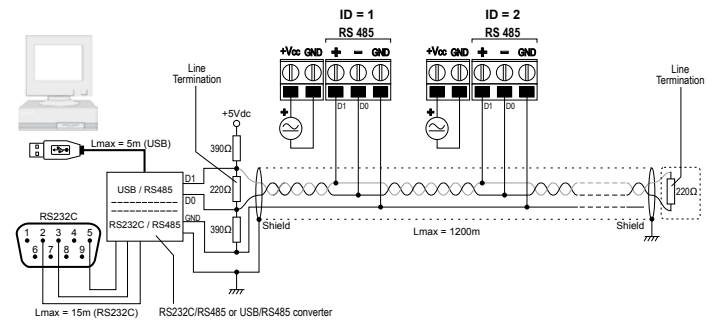

Line termination must be set at the two network ends. To polarize the line during non-transmission periods, resistors are connected between signal and power supply lines. If more than 32 devices have to be connected, place a signal repeater between a group and the next one. The line termination must be connected at both ends of each segment. The instrument has a built-in line termination that can be connected or removed through a short jumper placed next to the terminal block. If the instrument is the last or the first device of a network group, connect the termination placing the short jumper between the "RT" and "240 ohm" indications. If the instrument is not at the end of a network group, remove the termination placing the short jumper between the "RT" and "OPEN" indications.

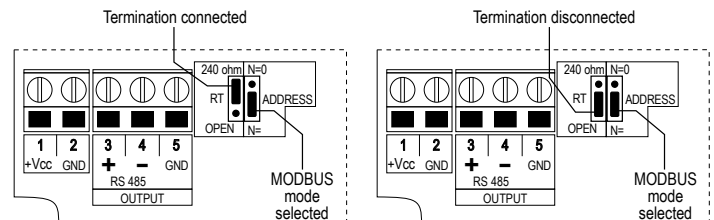

The cable shield must be connected to both line ends. The cable should have the following features:

- Characteristic impedance: 120 ohm
- Capacity: less than 50pF/m
- Resistance: less than 100 ohm/km
- gauge: 0,22 mm² (AWG24) at least

The cable maximum length depends on baud rate and cable characteristics. Typically, the maximum length is 1200m. The data line must be kept separated from any power lines in order to prevent interferences on the transmitted signal.


For connection to a PC, a RS232/RS485 or a USB/RS485 converter must be used. To operate with the MODBUS-RTU protocol be sure that the ADDRESS short jumper is between "ADDRESS" and "N=" indications.

Each transmitter of the network is univocally identified by an address. **Transmitters having the same address shall not be present in the network.** The address must be configured before connecting the instrument to the network. To set the instrument address use the **HD48STCAL** kit. The kit includes the **RS48** cable with built-in USB/RS485 adapter and a CD-ROM for Windows® operating systems. To configure the instrument it is necessary to move the ADDRESS short jumper between the "ADDRESS" and "N=0" indications to select the setup mode. After the configuration, move the short jumper back between the "ADDRESS" and "N=" indications.

HD49.. series

Follow the connection schemes shown below, the maximum load resistance that can be connected to each 4...20mA output depends on the power supply Vcc applied, according to the relation:


$$R_{l,Max} = (V_{cc}-12)/0.022V, \text{ e.g. if } V_{cc}=24V_{dc} \text{ the max load is } R_{l,Max} = 545 \text{ ohm.}$$

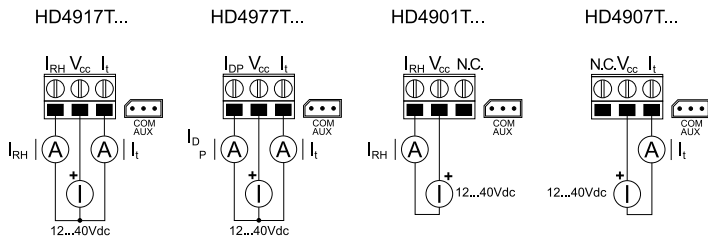


Relative humidity probe calibration

The HD48.. and HD49.. transmitters are supplied factory calibrated and ready to use. If necessary, it is possible to calibrate the relative humidity sensor using the saturated salt solutions **HD75** (75% RH saturated salt solution) and **HD33** (33% RH saturated salt solution) and connecting the instrument to the PC. For the models with analog output, provided with RS232 (COM AUX) serial connector, use the **HD48TCAL** kit. The kit includes the **RS27** cable for the serial connection of the transmitters to the PC and a CD-ROM for Windows® operating systems, that guides the user in the relative humidity probe calibration procedure.


For the models with RS485 output, use the **HD48STCAL** Kit. The kit includes the **RS48** cable with built-in USB/RS485 adapter and a CD-ROM for Windows® operating systems, that guides the user in the relative humidity probe calibration procedure. To calibrate the instrument it is necessary to move the ADDRESS short jumper between the "ADDRESS" and "N=0" indications to select the setup mode. After the calibration, move the short jumper back between the "ADDRESS" and "N=" indications.

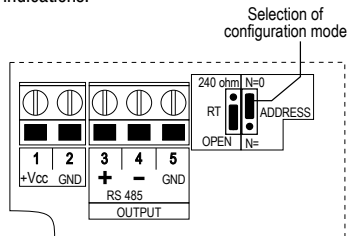


Case dimensions

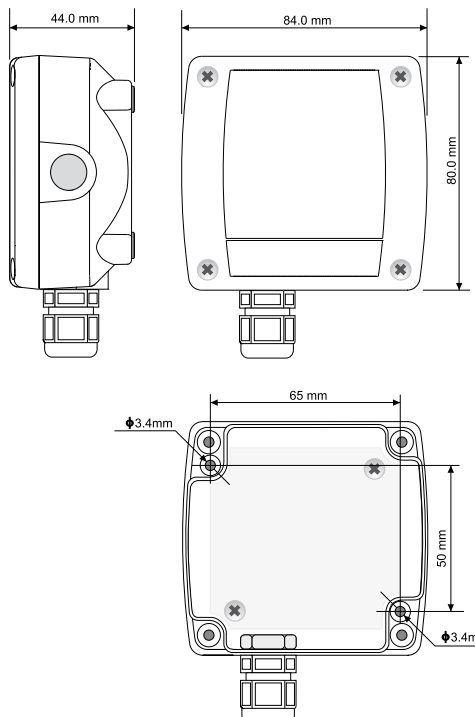

Probe dimensions: TO series

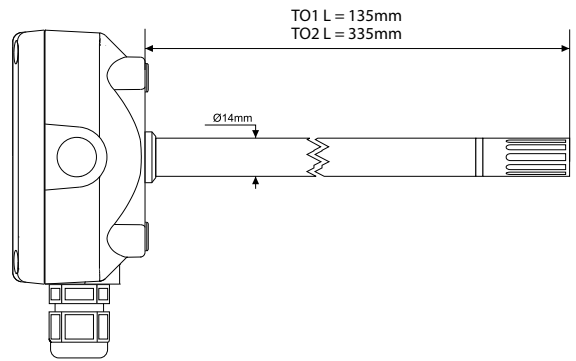


TV series

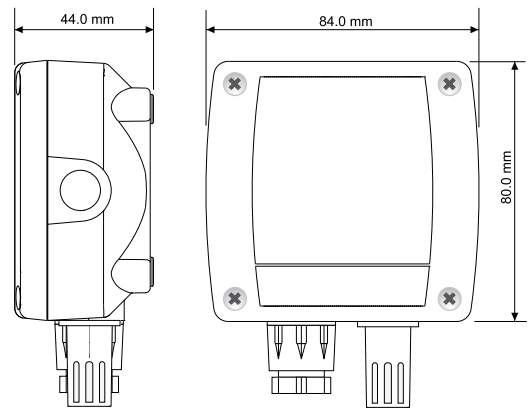

Humidity

TC series

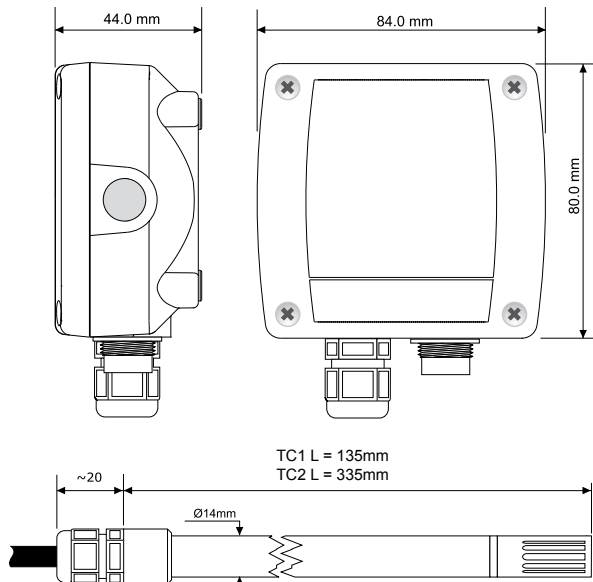

ORDERING CODES

HD48	HD49		T	L	L = with LCD display
					Cable length 2 = 2m 5 = 5m 10 = 10m
					Probe type T01 = 135mm T02 = 335mm TC1 = 135mm TC2 = 335mm TV = wall mounting
					No sign = standard range -20...+80°C E = extended range -40...+150°C
					07 = temperature output 01 = %RH output 17 = Temperature and %RH outputs 77 = Temperature and dew point outputs
					No sign = 4...20mA analogue output V = 0...10Vdc analog output (only HD48.. models) S = solo uscita RS485 Note: Versions with analogue output have one analogue output for each measured quantity.

Ordering code examples

HD4801TV: Wall mounting digital active relative humidity transmitter.

Relative humidity range 0...100%RH. Analog output: 4...20mA (0...100%RH).

Probe working range -20...+80°C. Power supply 16...40Vdc or 24Vac.

HD4917T01: Digital passive (current loop) temperature and relative humidity transmitter for duct mounting. AISI304 steel probe, diameter 14mm and stem length 135mm, joined to the electronics enclosure.

Relative humidity range 0...100%RH, temperature range -20...+80°C.

Analog outputs: 4...20mA (0...100%RH) for RH and 4...20mA (-20...+80°C) for temperature.

Probe working range -20...+80°C. Power supply 12...40Vdc.

HD4817TC25L: Digital active temperature and relative humidity transmitter with LCD display. AISI304 steel probe, diameter 14mm and stem length 335mm, connected to the electronics enclosure through a 5m cable.

Relative humidity range 0...100%RH, temperature range -20...+80°C.

Analog outputs: 4...20mA (0...100%RH) for RH and 4...20mA (-20...+80°C) for temperature.

Probe working range -20...+80°C. Power supply 16...40Vdc or 24Vac.

HD48V17ETC25: Digital active temperature and relative humidity transmitter, extended range. AISI304 steel probe, diameter 14mm and stem length 335mm, connected to the electronics enclosure through a 5m cable.

Relative humidity range 0...100%RH, temperature range -40...+150°C.

Analog outputs: 0...10V (0...100%RH) for RH and 0...10V (-40...+150°C) for temperature.

Probe working range -40...+150°C. Power supply 16...40Vdc or 24Vac.

HD48S17TC25L: Digital active temperature and relative humidity transmitter with LCD. AISI304 steel probe, diameter 14mm and stem length 335mm, connected to the electronics enclosure through a 5m cable.

Relative humidity range 0...100%RH, temperature range -20...+80°C.

RS485 output only. Probe working range -20...+80°C. Power supply 16...40Vdc or 24Vac.

HD4877T02: Digital active temperature and dew point transmitter for duct mounting. AISI304 steel probe, diameter 14mm and stem length 135mm, joined to the electronics enclosure.

Dew point range -20...+80°C DP, temperature range -20...+80°C.

Analog outputs: 4...20mA (-20...80°C DP) for DP and 4...20mA (-20...+80°C) for temperature.

Probe working range -20...+80°C. Power supply 16...40Vdc or 24Vac.

HD4977T02: Digital passive (current loop) temperature and dew point transmitter for duct mounting. AISI304 steel probe, diameter 14mm and stem length 335mm, joined to the electronics enclosure.

Dew point range -20...+80°C DP, temperature range -20...+80°C.

Analog outputs: 4...20mA (-20...+80°C DP) for DP and 4...20mA (-20...+80°C) for temperature. Probe working range -20...+80°C. Power supply 12...40Vdc.

Accessories

HD48TCAL: The kit includes the **RS27** serial connection cable, RS232 null modem, with 9-pole sub-D female connector for PC and 3-pole connector for transmitter COM port, and CD-ROM for Windows operating systems that guides the user in the relative humidity probe calibration procedure. The kit is for the models with analog output only.

HD48STCAL: The kit includes the **RS48** cable with built-in USB/RS485 adapter and CD-ROM for Windows operating systems that guides the user in the relative humidity probe calibration procedure. The cable is provided with USB connector for the PC and 3 free wires on the instrument side. The kit is for the models with RS485 output only.

HD75: 75% RH saturated solution for the verification of the relative humidity sensor, complete with thread for probes with \varnothing 14mm and \varnothing 26mm.

HD33: 33% RH saturated solution for the verification of the relative humidity sensor, complete with thread for probes with \varnothing 14mm and \varnothing 26mm.

HD9008.31: Wall flange with cable gland to fix \varnothing 14mm probes.

PG16: AISI304 steel cable gland for \varnothing 14mm probes.

P5: Stainless steel grid protection for \varnothing 14mm probes.

P6: 20 μ sintered stainless steel protection for \varnothing 14mm probes.

P7: 10 μ PTFE protection for \varnothing 14mm probes.

P8: Stainless steel grid and Poca protection for \varnothing 14mm probes.

