

DC CURRENT METER

Application:

The panel meter is suitable for measuring the DC current.


Important features:

- Full digital operation (Icom System).
- LED display range: ± 9999 , unit marking by LED.
- Preset delivery or connecting to external device can be set (monlcom option).
- Automatic zero calibration.
- Plug in terminal blocks with screw.
- EMC compliance.



Illustration only.

Connection diagram:

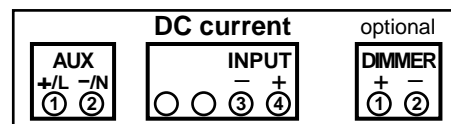

Technical specifications:

Input:

- Nominal input current range: from $0 \dots \pm 0.02$ A to $0 \dots \pm 5$ A DC
- Input measuring range: up to 120 % of the nominal value
- Input drop out voltage: 60 mV (at nominal current)
- Input insulation voltage: Cat. III. 1 kV (Test: $4300 V_{\text{eff}}$ 1 min)

Display:

- Display colours: red (basic version), orange, yellow, green, blue, white LED
- Height of digits: 14 mm
- Brightness control: via dimming input on rear (optional)
- Dimmer input signal: 5V PWM, approx. 1 kHz
- Dimmer input isolation: Cat. III. 1 kV (Test: $4300 V_{\text{eff}}$ 1 min)
- Display update: 2 /s
- Accuracy: ± 0.2 % FS, ± 1 digit (20 %..120 % input range)

Other:


- Standards applied: IEC/EN 61010-1, IEC/EN 61326
- Auxiliary supply consumption: max. 2 W
- Wire cross-section of terminals: max. 2.5 mm²
- Working temperature: -10...+25...+60 °C
- Temperature coefficient: max. 200 ppm/°C
- Warm-up time: 15 min
- Storage temperature: -40...+80 °C
- Humidity: max. 85 %
- Vibration (acceleration): max. 2 g
- Dimension (HxWxD): 36 mm x 72 mm x 74 mm
- Case protection: from the front IP 40, from behind IP 20
- Case material: PC-GF
- Weight: approx. 0.3 kg

DC CURRENT METER

Auxiliary Supply variations:

| | |
|---|-----------------------------|
| | (Voltage / Insulation) |
| 5 V, 12 V, 24 V, 48 V DC $\pm 50\%$, converter | / 1 kV |
| 55...264 V, 47...440 Hz, and 72...370 V DC, converter | / 3 kV |
| 9...28 V DC | / not isolated from display |

Isolation scheme:

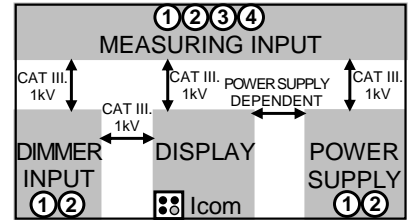

Ordering examples: (Input; Display: range, unit, colour; Auxiliary Supply)

CD40-72p-ADC _ Input: 0... ± 5 A DC _ Display: 0... ± 10.00 kA, red _ Aux: 55..264 V AC converter

CD40-72p-ADC _ Input: 0... ± 1 A DC _ Display: 0... ± 50.00 A, green, dimmable _ Aux: 24 V DC converter

On request for extra charge special ranges (Input, Display, Auxiliary Supply) are possible.

Outline and cut-out dimensions:

