



TEMPERATURE SENSOR


type 391

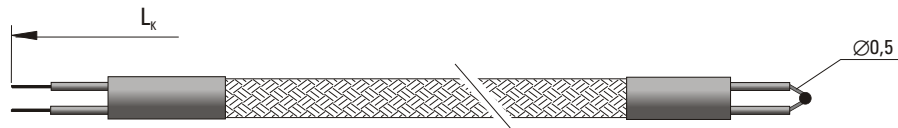


type 392

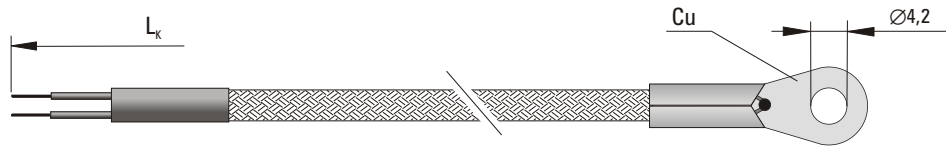


type 393

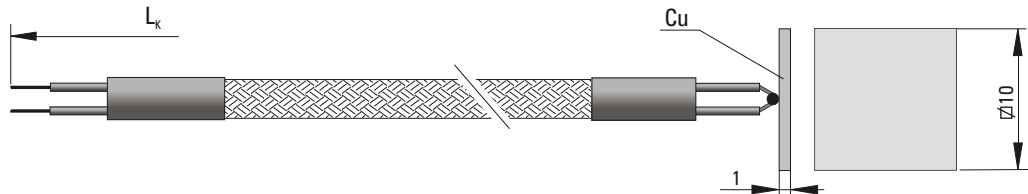


type 394

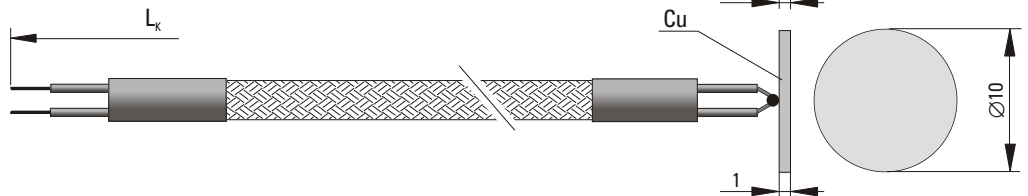

type 395

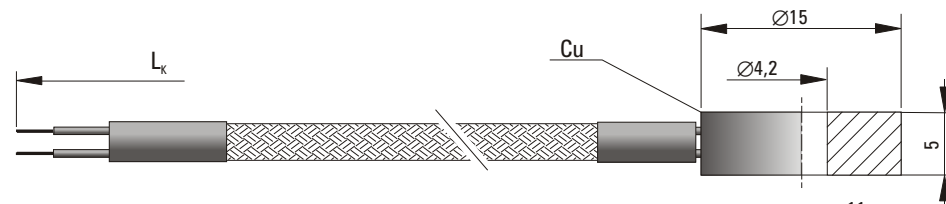

type 396

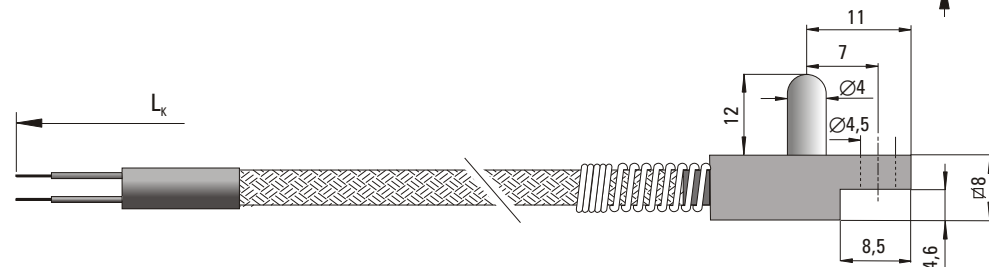

SPECIFICATION

Application	surface temperature measurement of blocks and machinery parts
Temperature range	-40°C... +400°C
Measuring element	Cu-CuNi (T), Fe-CuNi (J), NiCr-NiAl (K)
Class of thermocouple	2
Measuring junction	grounded
Cable insulation	fiber glass ⁽²⁾

⁽¹⁾ Other parameters according to customer requirements

ORDERING CODE



Sensor type **391, 392, 393, 394, 395, 396**

Measuring element **T, J or K**

Sensor length $L_k = 0,5, 1,5$ or $2,5$ m ⁽¹⁾

Example for order: TP-392J-0,5 thermocouple sensor Fe-CuNi (J), of opening diameter $\varnothing = 4,2$ mm and length of compensation cable $L_k = 0,5$ m.