


TEMPERATURE SENSOR

type 801, 802, 803, 804, 805

DSPECIFICATION


Measuring element	NiCr-NiAl PtRh90/10%-Pt PtRh70/30%-PtRh94/6%	(K) ⁽¹⁾ (S) (B)
Class of thermocouple	2 ⁽²⁾	
Spacer diameter	Ø22 mm	
Ceramic sheath diameter	Ø15 mm	
Sheath material	ceramic C610 (Al ₂ O ₃ 60%) ceramic C799 (Al ₂ O ₃ 99,7%)	
Connection head type	B or NA ⁽³⁾	
Head operating temperature	-40°C... +100°C	
Additional accessories	clamping plate type UZ temperature transmitter compensation cable	

⁽¹⁾ Thermocouple PtRh87/13%-Pt (R) or NiCrSi-NiSi (N) on demand
⁽²⁾ Other parameters according to customer requirements
⁽³⁾ Connection head with protection class IP65 or acid resistant on demand

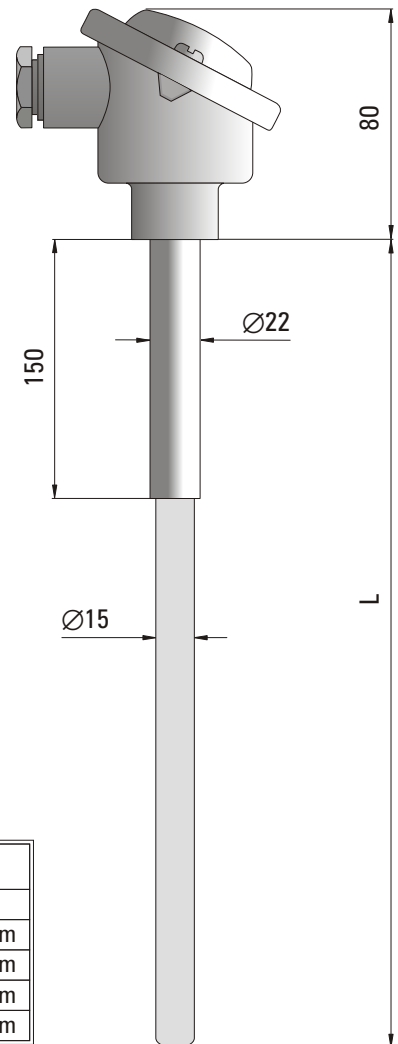

Sensor type	Sheath material	Max. temperature (°C)	Type of thermocouple
TP-801	ceramic C610	1200	NiCr-NiAl
TP-802	ceramic C610	1300	PtRh90/10%-Pt 0,35 mm
TP-803	ceramic C610	1400	PtRh90/10%-Pt 0,50 mm
TP-804	ceramic C799	1500	PtRh90/10%-Pt 0,50 mm
TP-805	ceramic C799	1600	PtRh70/30%-PtRh94/6% 0,50 mm

ORDERING CODE

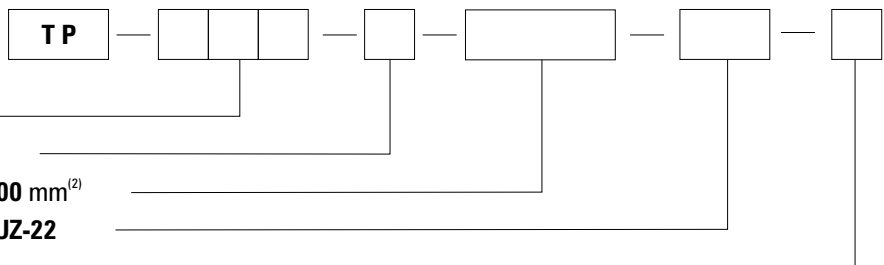

Sensor type **801, 802, 803, 804, 805**
 Single (1) or double (2) measuring element
 Sensor length L= **300, 500, 700, 1000** or **1400** mm⁽²⁾
 Additional accessories: clamping plate type **UZ-22**
 Option with the head-mount transmitter **T**

Example for order: TP-801-1-500 sensor with thermocouple NiCr-NiAl (K) in ceramic sheath C610 of outer diameter Ø = 15 mm and length L= 500 mm.
 TP-801-1-500-T; TCH-2170-K sensor with the head-mount transmitter type TCH-2170-K.