

Three-phase current transformer set

ASK(D) 31.5
ASK(D) 31.5 2U
with Plexiglas caps

Configuration:


The measuring transformer set consists of 3 individual current transformers which are mounted on an aluminium base plate together with the primary conductors L1, L2, L3. Transparent sealable covers protect the secondary terminals of the current transformers against external tampering.


Stipulation of the VBG4 (German protection clause) demands that all voltage carrying parts are made shock-proof with transparent isolating covers which are included in the deliveries.

As an option the current transformer set can be supplied with or without fuses. The voltage can be tapped either from the 10 A-fuse element or directly from the individual primary conductor.

The configuration of this current transformer set conforms to:



DIN VDE 0414/1
DIN 42600 IEC 185
VBG 4

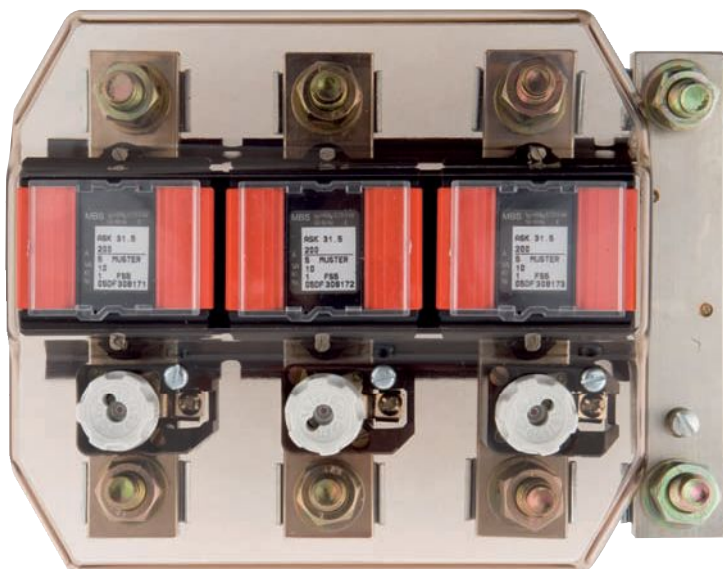

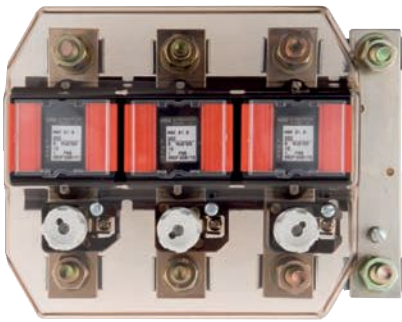

ASK(D) 31.5

Three-phase current transformer set

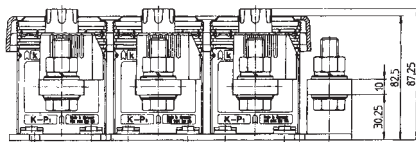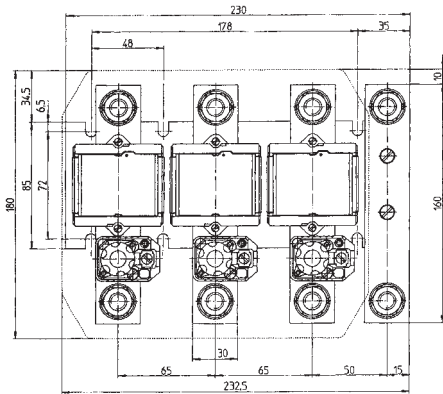

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 75	2.5	57043	57011	57243	57211
	5	57044	57012	57244	57212
3 x 100	2.5	57045	57013	57245	57213
	5	57046	57014	57246	57214
3 x 150	2.5	57047	57015	57247	57215
	5	57048	57016	57248	57216
3 x 200	2.5	57049	57017	57249	57217
	5	57050	57018	57250	57218
3 x 250	2.5	57051	57019	57251	57219
	5	57052	57020	57252	57220
3 x 300	10	57053	57021	57253	57221
	15	57054	57022	57254	57222
3 x 300	2.5	57055	57023	57255	57223
	5	57056	57024	57256	57224
3 x 400	10	57057	57025	57257	57225
	15	57058	57026	57258	57226
3 x 400	2.5	57059	57027	57259	57227
	5	57060	57028	57260	57228
3 x 500	10	57061	57029	57261	57229
	15	57062	57030	57262	57230
3 x 500	2.5	57063	57031	57263	57231
	5	57064	57032	57264	57232
3 x 600	10	57065	57033	57265	57233
	15	57066	57034	57266	57234
3 x 600	2.5	57067	57035	57267	57235
	5	57068	57036	57268	57236
3 x 750	10	57069	57037	57269	57237
	15	57070	57038	57270	57238
3 x 750	2.5	57071	57039	57271	57239
	5	57072	57040	57272	57240
3 x 750	10	57073	57041	57273	57241
	15	57074	57042	57274	57242

ASK(D) 31.5 2U

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 200-100	5-2.5	57090	57080	57290	57280
	10-5	57091	57081	57291	57281
3 x 300-150	5-2.5	57092	57082	57292	57282
	10-5	57093	57083	57293	57283
3 x 400-200	5-2.5	57094	57084	57294	57284
	10-5	57095	57085	57295	57285
3 x 500-250	5-2.5	57096	57086	57296	57286
	10-5	57097	57087	57297	57287
3 x 600-300	5-2.5	57098	57088	57298	57288
	10-5	57099	57089	57299	57289