


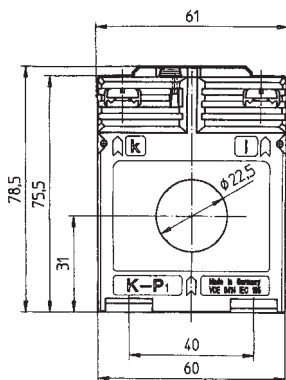




SASR 22.3

Protection tube current transformer

Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5 Art.-no.	10P5 Art.-no.	5P5 Art.-no.	10P5 Art.-no.
100	1				S04-1317B
125	1	S04-1506B	S04-1507B		
	1.5			S04-1516C	S04-1517C
150	1	S04-1606B	S04-1607B		
	1.5			S04-1616C	S04-1617C
200	1	S04-1706B	S04-1707B		
	1.5			S04-1716C	S04-1717C
250	1	S04-1806B	S04-1807B		
	1.5			S04-1816C	S04-1817C
300	1	S04-1906B	S04-1907B		
	1.5		S04-1907C	S04-1916C	S04-1917C

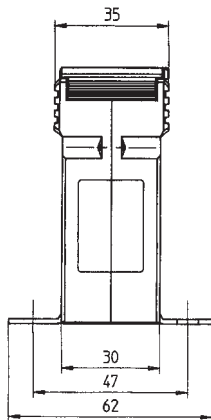

Snap-on mounting

Primary conductor	—
Round conductor	Ø 22.5 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Current transformer for industrial application	see page 35
Current transformer for tariff applications	see page 167