




SASK 61.4

Protection plug-in current transformer

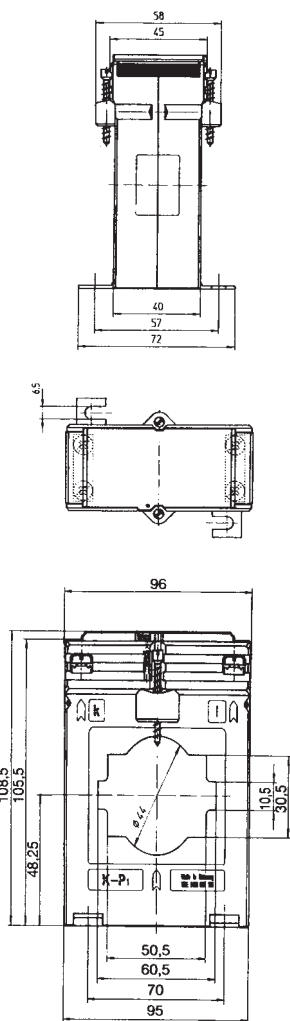

Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5	10P5	5P5	10P5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	1	S41-1706B	S41-1707B	S41-1716B	S41-1717B
	1.5	S41-1706C	S41-1707C	S41-1716C	S41-1717C
250	1	S41-1806B	S41-1807B	S41-1816B	S41-1817B
	1.5	S41-1806C	S41-1807C	S41-1816C	S41-1817C
300	1.5	S41-1906C	S41-1907C	S41-1916C	S41-1917C
	2.5		S41-1907D	S41-1916D	S41-1917D
400	1.5	S41-2006C	S41-2007C	S41-2016C	S41-2017C
	2.5	S41-2006D	S41-2007D	S41-2016D	S41-2017D
500	1.5	S41-2106C	S41-2107C	S41-2116C	S41-2117C
	2.5	S41-2106D	S41-2107D	S41-2116D	S41-2117D
600	1.5	S41-2206C	S41-2207C	S41-2216C	S41-2217C
	2.5	S41-2206D	S41-2207D	S41-2216D	S41-2217D
	5			S41-2216F	S41-2217F
750	1.5	S41-2306C	S41-2307C	S41-2316C	S41-2317C
	2.5	S41-2306D	S41-2307D	S41-2316D	S41-2317D
	5	S41-2307F	S41-2307F	S41-2316F	S41-2317F
1000	1.5	S41-2506C	S41-2507C	S41-2516C	S41-2517C
	2.5	S41-2506D	S41-2507D	S41-2516D	S41-2517D
	5	S41-2506F	S41-2507F	S41-2516F	S41-2517F
1200	1.5	S41-2606C	S41-2607C	S41-2616C	S41-2617C
	2.5	S41-2606D	S41-2607D	S41-2616D	S41-2617D
	5	S41-2606F	S41-2607F	S41-2616F	S41-2617F
1250	1.5	S41-2706C	S41-2707C	S41-2716C	S41-2717C
	2.5	S41-2706D	S41-2707D	S41-2716D	S41-2717D
	5	S41-2706F	S41-2707F	S41-2716F	S41-2717F

Primary conductor	63 x 10 mm 2 x 50 x 10 mm
Round conductor	Ø 44 mm
Transformer width	96 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 70
Current transformer for tariff applications	see page 182