
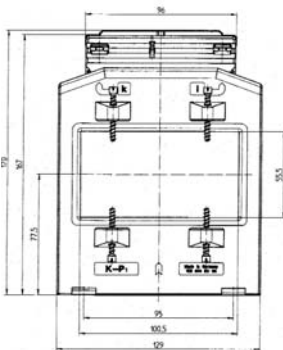



SASK 105.6

Protection plug-in current transformer

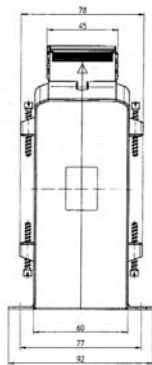

Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5	10P5	5P5	10P5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
600	2.5	S56-2206C	S56-2207C	S56-2216C	S56-2217C
	5	S56-2206F	S56-2207F	S56-2216F	S56-2217F
750	2.5	S56-2306C	S56-2307C	S56-2316C	S56-2317C
	5	S56-2306F	S56-2307F	S56-2316F	S56-2317F
	10		S56-2307H	S56-2316H	S56-2317H
1000	5	S56-2506F	S56-2507F	S56-2516F	S56-2517F
	10	S56-2506H	S56-2507H	S56-2516H	S56-2517H
	15				S56-2517J
1200	5	S56-2606F	S56-2607F	S56-2616F	S56-2617F
	10	S56-2606H	S26-2607H	S56-2616H	S56-2617H
	15		S26-2607J	S56-2616J	S56-2617J
1250	5	S56-2706F	S56-2707F	S56-2716F	S56-2717F
	10	S56-2706H	S56-2707H	S56-2716H	S56-2717H
	15	S56-2706J	S56-2707J	S56-2716J	S56-2717J
1500	5	S56-2806F	S56-2807F	S56-2816F	S56-2817F
	10	S56-2806H	S56-2807H	S56-2816H	S56-2817H
	15	S56-2806J	S56-2807J	S56-2816J	S56-2817J
1600	10	S56-2906H	S56-2907H	S56-2916H	S56-2917H
	15	S56-2906J	S56-2907J	S56-2916J	S59-2917J

Primary conductor	100 x 55 mm
Round conductor	Ø 55 mm
Transformer width	129 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 86
Current transformer for tariff applications	see page 188