

GENERAL Inclinometer MEMS technology.

High performance, high IP rating, resistance to shock and vibrations, and high electromagnetic compatibility make this sensor suitable for mobile hydraulic applications.

Developed to guarantee a robust, high-performance solution for applications such as agricultural vehicles, earth-moving machines, and hoisting equipment.

### TECHNICAL SPECIFICATIONS

#### Measurement Range

$\pm 10^\circ \pm 15^\circ \pm 20^\circ \pm 30^\circ \pm 45^\circ \pm 60^\circ \pm 85^\circ$  (single Z axis for analog output - XY dual axis)  
 $360^\circ (\pm 180^\circ)$  only for single Z axis

#### Supply voltage

+5Vdc (only for 0.5...4.5Vdc output); +10...+36VDC (see output signal for right supply voltage)

#### Output signal

0.5...4.5V RATIOMETRIC (supply +5Vdc); 0.5...4.5V; 0...10V; 4...20mA; CANopen

#### Electrical connections

M12 connector output; cable output

#### Resolution

12 bit (analog output); 0.01 deg (CANopen output)

#### Accuracy (Factory verification @ 25 °C)

<  $\pm 0.5\%$  FS

#### Working temperature

-40... +85°C

#### Temperature coefficient at 0-deg inclination

Typical <  $\pm 0.006$  deg/°C

#### Long term repeatability

Single axis: Typical <  $\pm 0.5$  deg in the range  $\pm 180$  deg  
 Dual axis: Typical <  $\pm 0.5$  deg in the range  $\leq \pm 60$  deg,  $\pm 2$  deg otherwise

#### Vibrations

20g between 10 Hz ... 2000 Hz secondo IEC 60068-2-6

#### Shock

Pulse on 3 axes; 50g 11 ms secondo IEC 60068-2-27

#### Electromagnetic compatibility

2014/30/EU Electromagnetic Compatibility (EMC)

#### IP Protection Level


IP67 - IPX9K with female homologated connector mounted, tightening torque 1.7Nm (GIG-M M12 connector version) IP67 - IPX9K (GIG-F cable-PUR version)

#### Housing body


PBT

### MECHANICAL DIMENSIONS

#### M12 VERSION


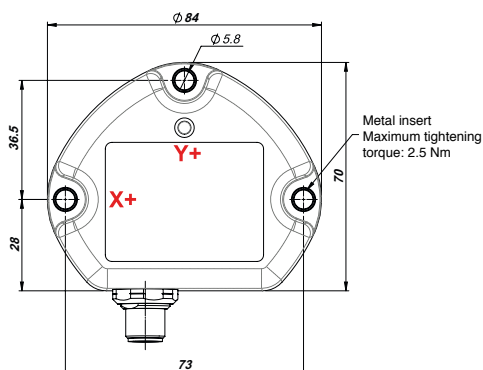


#### CABLE VERSION

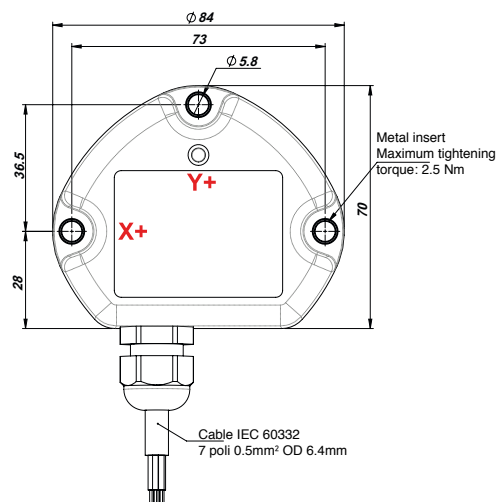

# ELECTRICAL CONNECTIONS

## M12 VERSION

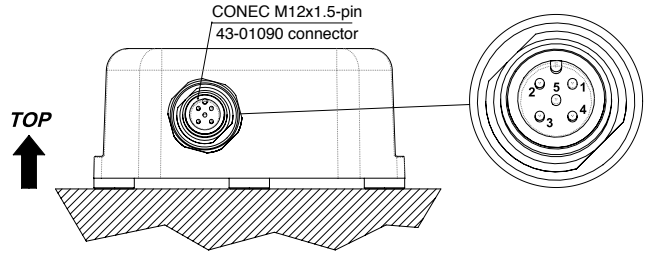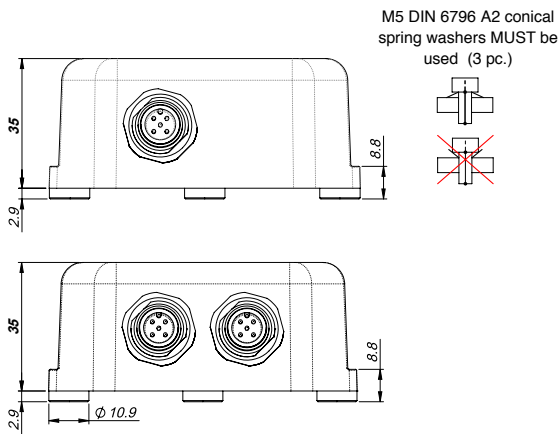

CONNECTIONS	CAN CONNECTIONS
1. + SUPPLY	1. n.c.
2. OUTPUT Y	2. + SUPPLY
3. GROUND	3. GROUND
4. OUTPUT X	4. CAN H
5. n.c.	5. CAN L



## DUAL AXIS



## SINGLE AXIS



## CABLE VERSION

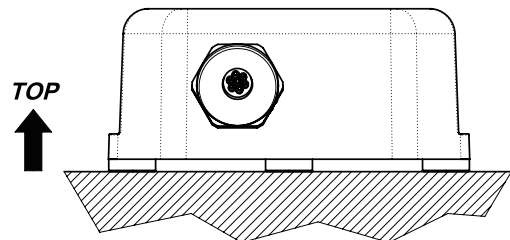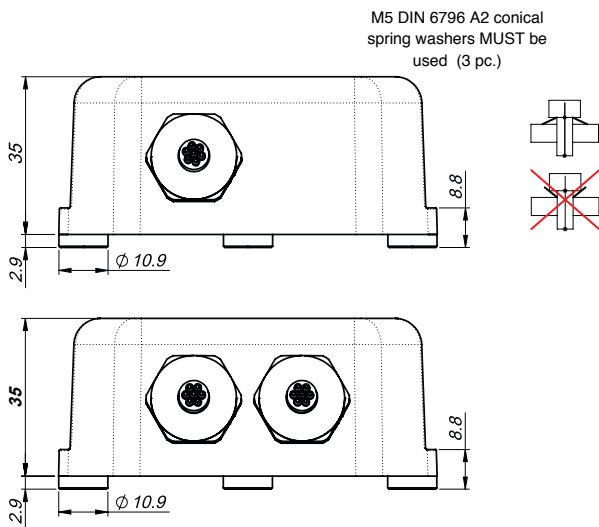

CONNECTIONS	CAN CONNECTIONS
1. WHITE +SUPPLY	1. WHITE +SUPPLY
2. YELLOW GROUND	2. YELLOW GROUND
3. GREY OUTPUT X	3. GREY CAN H
4. BLUE OUTPUT Y	4. BLUE CAN L
5. PINK n.c.	5. PINK n.c.
6. GREEN n.c.	6. GREEN n.c.
7. BROWN n.c.	7. BROWN n.c.

## DUAL AXIS



## SINGLE AXIS



ITEMS MARKED "n.c." SHOULD NOT BE CONNECTED

## AUTOZERO FUNCTION (additional function)

available for analog single circuit versions in GIG-XY configuration (dual axis)




To activate **the Autozero function** make sure that:

- sensor is powered
- fixing surface is free of dust or grease
- sensor is fixed on the horizontal plane with suitable screws



### ATTENTION!

The Autozero function can be defined **within a maximum range of +/- 4.5°** from the original zero position (factory set).


Hold the **magnetic pen** (accessory to order-PKIT312) to the **ZERO POINT**  indicated on the product label .

Hold the position for **at least 3-5 seconds** so that the operation is successful.






# OPERATING SPECIFICATIONS: OUTPUT SIGNAL GRAPHS



DUAL AXIS INCLINOMETER (XY) – X AXIS

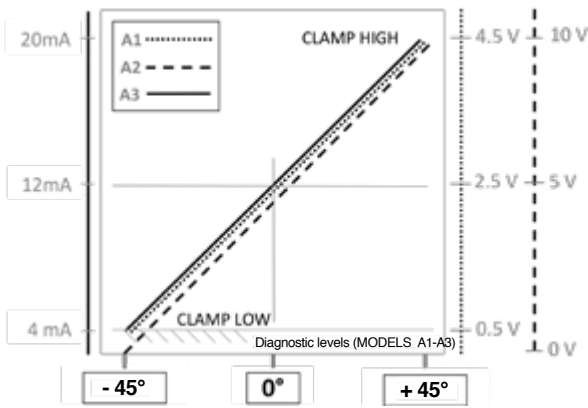

DUAL AXIS INCLINOMETER (XY) – Y AXIS

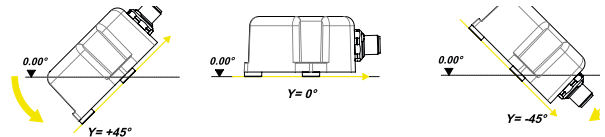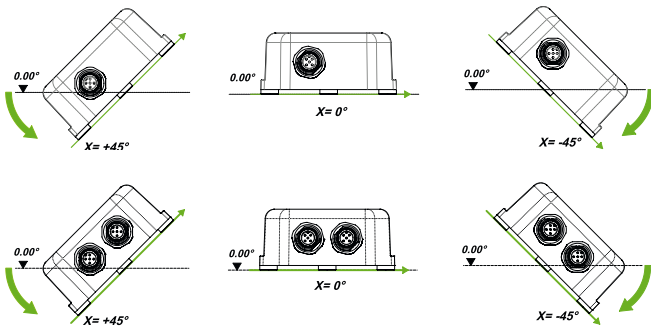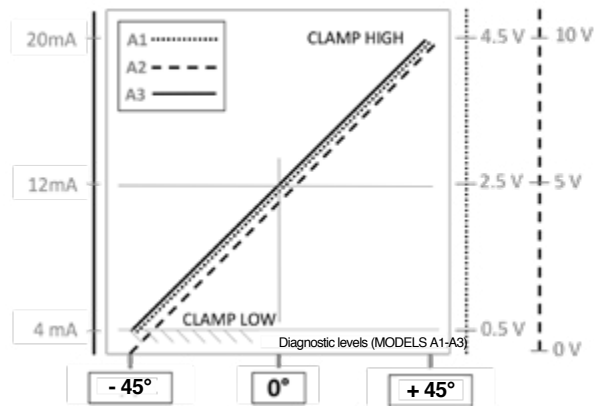

SINGLE AXIS INCLINOMETER ( $\pm 180^\circ$ ) – Z AXIS

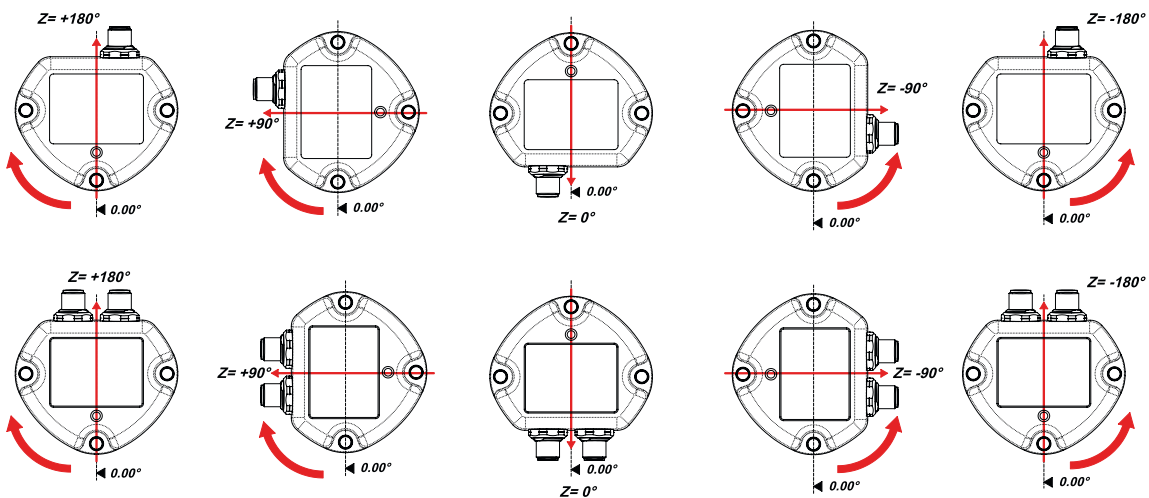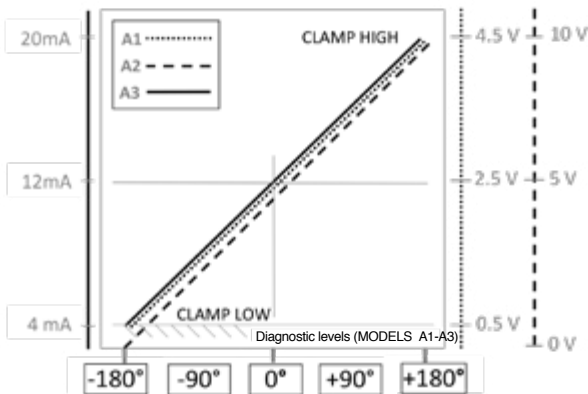

## LOAD CONDITIONS

+0.5VDC...+4.5 VDC output with power +10...36VDC and +0..10VDC output with power +11..36VDC: apply a load resistance > 100Kohm

+0.5VDC...+4.5VDC output (powered at +5VDC): apply a load resistance > 100Kohm

4..20mA output (with supply < 15Vdc to 10Vdc): maximum allowed load resistance is 200 ohm

4..20mA output (with supply > 15Vdc up to 36): maximum allowed load resistance is 500 ohm

## ORDERING CODE

ELECTRICAL CONNECTIONS	
M12 connector output	<b>M</b>
Cable output (specify cable length)	<b>F</b>

AXIS TYPE	
Dual axis (XY axis)	<b>O</b>
Single axis 360° (Z axis)	<b>V</b>

CIRCUIT TYPE	
Single	<b>S</b>
Redundant	<b>R</b>

OUTPUT 1 MEASURING RANGE (output for single circuit)	
measuring range (indicate) ±10° ±15° ±20° ±30° ±45° ±60° ±85° (single Z axis for analog output-XY dual axis); 360° (±180°) only for single Z axis	<b>XXX</b>

OUTPUT 2 MEASURING RANGE (only for redundant version)	
measuring range (indicate) ±10° ±15° ±20° ±30° ±45° ±60° ±85° (single Z axis for analog output-XY dual axis); 360° (±180°) only for single Z axis	<b>XXX</b>

SUPPLY VOLTAGE	
+5Vdc (only for A1 output)	<b>L</b>
+10...+36Vdc (see output signal for right supply voltage)	<b>H</b>

OUTPUT TYPE	
+0.5...+4.5Vdc (available with supply L = ratiometric output and with supply H = 0.5...4.5V output)	<b>A1</b>
0...+10Vdc (powered at +11...36Vdc)	<b>A2</b>
4...20mA output (powered at +10...36Vdc)	<b>A3</b>
CANopen output (powered at +10...36Vdc)	<b>C1</b>

CABLE	
Cable without connector (always "0" in case of GIG-M version)	<b>0</b>

CERTIFICATES	
<b>0</b>	No certificate enclosed
<b>L</b>	Linearity curve enclosed

ACCESSORIES	
<b>X</b>	No accessory
<b>Y</b>	Magnetic pen ( <b>PKIT312</b> ) - for single circuit type only

CABLE LENGTH	
<b>01</b>	100 mm cable
<b>02</b>	200 mm cable
<b>05</b>	500 mm cable
<b>10</b>	1m cable
<b>20</b>	2m cable
<b>.....</b>	other lengths on request

### EXAMPLE OF DESCRIPTION: GIGFOS03000HA30 000X01

<b>GIG</b>	<b>F</b>	<b>O</b>	<b>S</b>	<b>030</b>	<b>000</b>	<b>H</b>	<b>A3</b>	<b>0</b>	<b>0</b>	<b>000</b>	<b>X</b>	<b>01</b>
	cable output	dual axis XY	single	±30°	ND	+10...36Vdc	4...20mA output	cable only	no certificate attached	special execution	no accessories	100mm cable

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice.

# GEFRAN

**GEFRAN spa**  
via Sebina, 74  
25050 PROVAGLIO D'ISEO (BS) - ITALIA  
tel. 0309888.1 - fax. 0309839063  
Internet: <http://www.gefran.com>

DTS\_GIG\_11-2019\_ENG

