


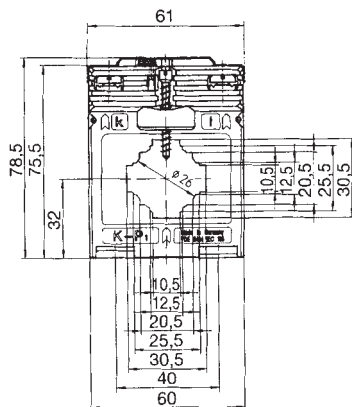




# EASK 31.3

## Plug-in current transformer

Approved current transformer for tariff applications

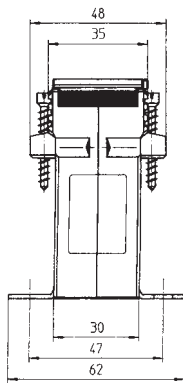

Snap-on mounting

Secondary current		5A		
Primary current A	Burden VA	Accuracy class		
		0.5 Art.-no.	0.5s Art.-no.	0.2 Art.-no.
100	1.5	7533	7555	7511
	2.5	7534	7556	
150	1.5	7535	7557	7513
	2.5	7536	7558	
200	2.5	7537	7559	7515
	5	7538	7560	7516
250	2.5	7539	7561	7517
	5	7540	7562	7518
300	2.5	7541	7563	7519
	5	7542	7564	7520
400	2.5	7543	7565	7521
	5	7544	7566	7522
500	2.5	7546	7568	7524
	5	7547	7569	7525
600	2.5	7549	7571	7527
	5	7550	7572	7528
750	2.5	7552	7574	7530
	5	7553	7575	7531

Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 26 mm
Transformer width	61 mm
Snap-on mounting	<b>Art.-no. 53011</b> see page 204
Sealed shutter	<b>Art.-no. 59040</b> see page 205
Current transformer for industrial applications	see page 45